



Unit = $\frac{\text{mm}}{[\text{inch}]}$

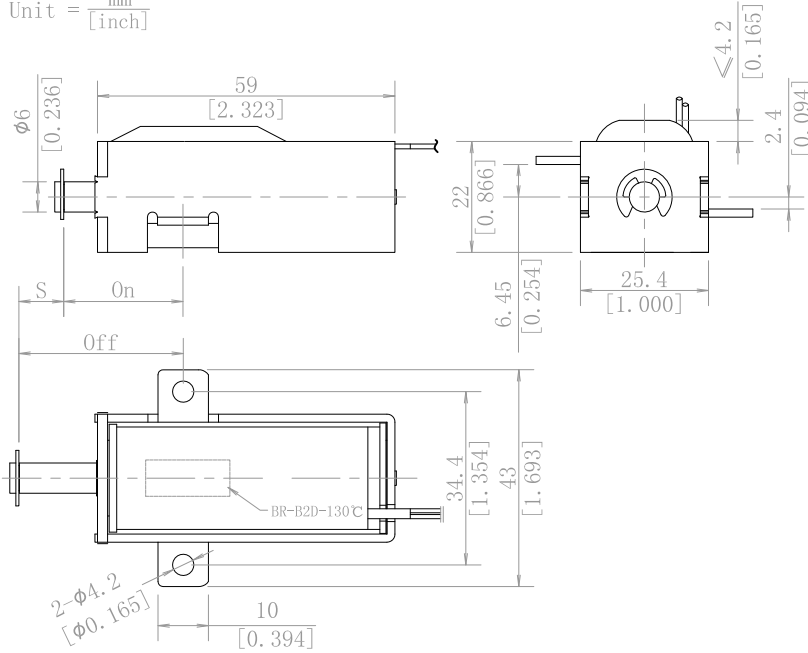

Total weight 总重量 : 145g
Plunger weight 滑杆重量: 15g

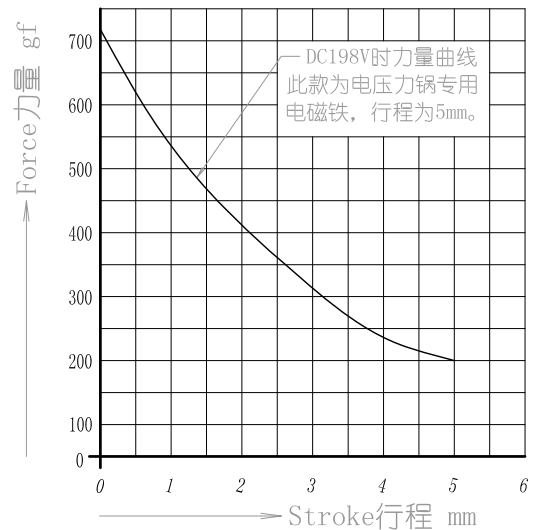

Duty cycle 负载周期 = $100\% \times \frac{\text{On Time 通电时间}}{\text{On Time 通电时间} + \text{Off Time 断电时间}}$	100%	50%	25%	10%
		Continuous 连续通电	Intermittent 间歇通电	
Max On time/S 最长通电时间/秒	∞	--	--	--
Power 功率 (20°C)	--	--	--	--
Part Number 产品型号 (** : Resistance 电阻)	SD0-0660L-198A3000			
产品上电使用参考说明	<p>Timing diagram showing voltage pulses for DC198V and DC66V stages. The DC198V pulse width is 10ms, and the DC66V pulse width is 10ms. The DC198V pulse is followed by a 20ms delay, then the DC66V pulse. The DC198V pulse is labeled as DC198V吸合阶段 (80ms) and the DC66V pulse is labeled as DC66V保持阶段.</p>			

Shenzhen Zanty Electronics Co.,Ltd.

Add: C2&A2 building, Jihua Industry District, Buji Town, Shenzhen, China P.C.: 518112

Tel.: (+86 755) 2854 3752

Fax: (+86 755) 2854 3458

E-mail: Sales@Zanty.com

Website: www.zanty.com